



# Huntingdonshire Level 2 Strategic Flood Risk Assessment Site Summary

Site CfS:198

# **Final Draft Report**

Prepared for
Huntingdonshire District
Council

Date
November 2025





## **Document Status**

Issue date 6 November 2025

Issued to Frances Schulz

BIM reference JFI-JBA-XX-XX-RP-EN-0012

Revision P03

Prepared by Mike Williamson BSc MSc CGeog FRGS EADA

**Principal Analyst** 

Reviewed by Laura Thompson BSc FRGS

Analyst

Authorised by Paul Eccleston BA CertWEM CEnv MCIWEM C.WEM

**Technical Director** 

\_\_\_\_\_\_

# **Carbon Footprint**

The format of this report is optimised for reading digitally in pdf format. Paper consumption produces substantial carbon emissions and other environmental impacts through the extraction, production and transportation of paper. Printing also generates emissions and impacts from the manufacture of printers and inks and from the energy used to power a printer. Please consider the environment before printing.

\_\_\_\_\_\_

# **Accessibility**

JBA aims to align with governmental guidelines on accessible documents and WGAG 2.2 AA standards, so that most people can read this document without having to employ special adaptation measures. This document is also optimised for use with assistive technology, such as screen reading software.

\_\_\_\_\_



## **Contract**

JBA Project Manager Mike Williamson

Address Phoenix House, Lakeside Drive, Centre Park, Warrington, WA1

1RX

JBA Project Code 2022s1322

This report describes work commissioned by Huntingdonshire District Council by an instruction via email dated 21 July 2025. The Client's representative for the contract was Frances Schulz of Huntingdonshire District Council. Mike Williamson of JBA Consulting carried out this work.

#### Purpose and Disclaimer

Jeremy Benn Associates Limited ("JBA") has prepared this Report for the sole use of Huntingdonshire District Council in accordance with the Agreement under which our services were performed.

JBA has no liability for any use that is made of this Report except to Huntingdonshire District Council for the purposes for which it was originally commissioned and prepared.

No other warranty, expressed or implied, is made as to the professional advice included in this Report or any other services provided by JBA. This Report cannot be relied upon by any other party without the prior and express written agreement of JBA.

JBA disclaims any undertaking or obligation to advise any person of any change in any matter affecting the Report, which may come or be brought to JBA's attention after the date of the Report.

The methodology adopted and the sources of information used by JBA in providing its services are outlined in this Report. The work described in this Report was undertaken between 21 July 2025 and 6 November 2025 and is based on the conditions encountered and the information available during the said period. The scope of this Report and the services are accordingly factually limited by these circumstances.

The conclusions and recommendations contained in this Report are based upon information provided by others and upon the assumption that all relevant information has been provided by those parties from whom it has been requested and that such information is accurate.

\_\_\_\_\_\_

#### Acknowledgements

We would like to thank the Environment Agency, Cambridgeshire County Council for their assistance with this work.



# Copyright

© Jeremy Benn Associates Limited 2025

.....



# **Contents**

1	Backgrour	nd	1
	1.1	Site CfS:198	1
2	Flood risk	from rivers and sea	5
	2.1	Existing risk	5
	2.2	Flood risk management	6
	2.3	Impacts from climate change	7
	2.4	Historic flood incidents	7
	2.5	Emergency planning	7
	2.6	Observations, mitigation options, site suitability, sequential approach to development management - fluvial and tidal	9
3	Flood risk	from surface water	10
	3.1	Existing risk	10
	3.2	Impacts from climate change	13
	3.3	Observations, mitigation options, site suitability, sequential approach to development management - surface water	16
4	Cumulative	e impacts assessment and high risk catchments	18
	4.1	Level 1 cumulative impacts assessment	18
5	Groundwa	ter, geology, soils, SuDS suitability	19
6	Residual r	isk	22
	6.1	Flood risk from reservoirs	22
7	Overall site	e assessment	23
	7.1	Can part b) of the exception test be passed?	23
	7.2	Recommendations summary	23
	7.3	Site-specific FRA requirements and further work	23
8	Licencing		24



	_		
liet		-10	ures
டாது	. UI	ı ıu	ules

Figure 1-1: Existing site location boundary	2
Figure 1-2: Aerial photography	3
Figure 1-3: Topography	4
Figure 2-1: Existing risk	5
Figure 2-2: Natural Flood Management (NFM) potential mapping	6
Figure 2-3: Potential access and escape route	8
Figure 3-1: Surface water flood extents (NaFRA2 - Risk of Flooding from Surface Warmap)	ter 11
Figure 3-2: Medium risk event surface water flood depths (Third generation - Risk of Flooding from Surface Water map)	12
Figure 3-3: Medium risk event surface water flood hazard (Third generation - Risk of Flooding from Surface Water map)	13
Figure 3-4: Low risk event surface water flood extent, as a proxy for the medium risk of plus climate change (NaFRA2 - Risk of Flooding from Surface Water map)	
Figure 3-5: Low risk event surface water flood depths, as a proxy for the medium risk plus climate change (Third generation - Risk of Flooding from Surface Watmap)	
Figure 3-6: Low risk event surface water flood hazard, as a proxy for the medium risk plus climate change (Third generation - Risk of Flooding from Surface Watmap)	
Figure 5-1: JBA 5m Groundwater Emergence Map	19
Figure 5-2: Soils and geology	21



#### List of Tables

Table 2-1: Existing flood risk based on percentage area of site at risk	5
Table 3-1: Existing surface water flood risk based on percentage area at risk using the NaFRA2 RoFSW map	; 10
Table 5-1: Groundwater Hazard Classification	20



# 1 Background

This is a Level 2 Strategic Flood Risk Assessment (SFRA) site screening report for Local Plan Site CfS:198. The content of this report assumes the reader has already consulted the 'HDC Level 1 SFRA' (2024) and read the 'HDC Level 2 SFRA Main Report' (2025) and is therefore familiar with the terminology used in this report.

#### 1.1 Site CfS:198

- Location: Land to the North of Houghton Road (larger site), St Ives
- Existing site use: agricultural land
- Existing site use vulnerability: less vulnerable
- Proposed site use: mixed use
- Proposed site use vulnerability: more vulnerable
- Site area (ha): 23.67
- Watercourse: N/A
- Environment Agency (EA) model: N/A
- Summary of requirements from Level 2 SFRA scoping stage:
  - o Assessment of surface water flood extent, depths and hazards
  - Assessment of all other sources of flood risk



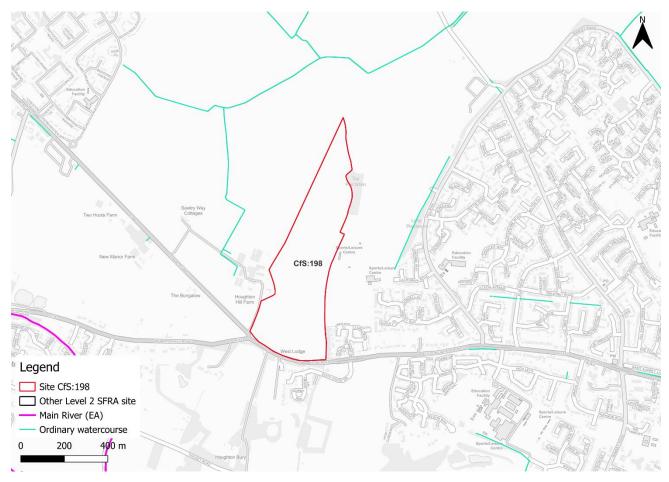


Figure 1-1: Existing site location boundary



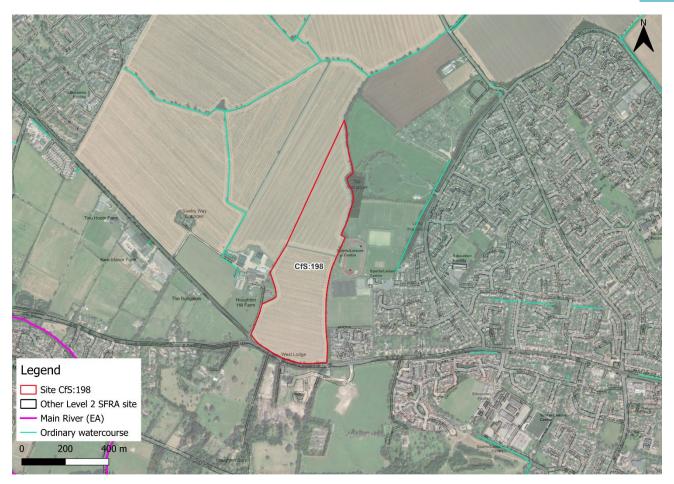


Figure 1-2: Aerial photography



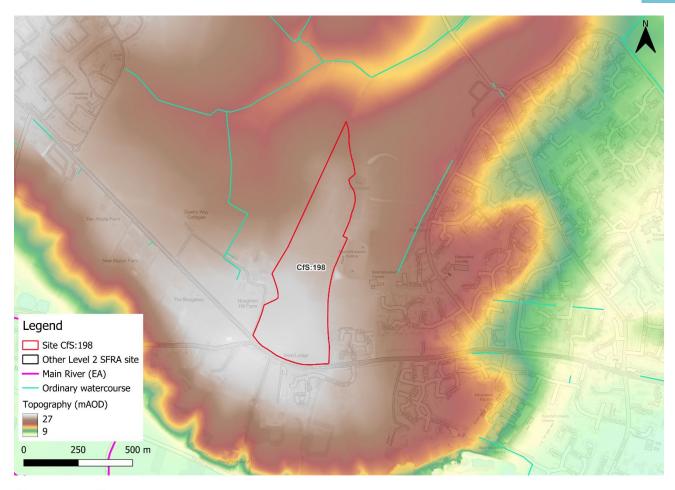


Figure 1-3: Topography



# 2 Flood risk from rivers and sea

#### 2.1 Existing risk

#### 2.1.1 Flood Map for Planning and functional floodplain

Based on the EA's Flood Map for Planning (accessed July 2025) and Flood Zone 3b (functional floodplain), as updated in this Level 2 SFRA, the percentage areas of the site within each flood zone are stated in Table 2-1 and can be viewed on Figure 2-1. This version of the Flood Map for Planning does not consider flood defence infrastructure (Section 2.2) or the impacts of climate change (Section 2.3).

The site is wholly within Flood Zone 1.

Table 2-1: Existing flood risk based on percentage area of site at risk

Flood Zone 1 (%	Flood Zone 2 (%	Flood Zone 3a (%	Flood Zone 3b (%
area)	area)	area)	area)
100	0	0	

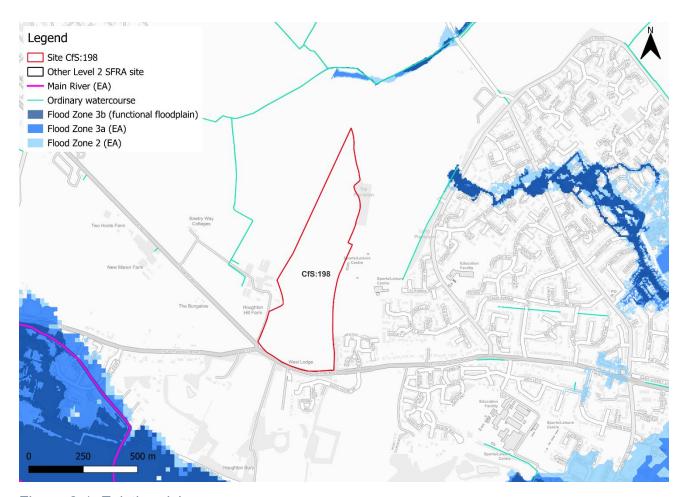


Figure 2-1: Existing risk



#### 2.2 Flood risk management

#### 2.2.1 Flood defences

There are no flood defences in the vicinity of the site, according to the EA's Spatial Flood Defences dataset.

#### 2.2.2 Working with Natural Processes

The EA's Working with Natural Processes (WwNP) dataset has been interrogated to identify opportunities for Natural Flood Management (NFM) to reduce flood risk to the site and surrounding areas. These areas are shown in Figure 2-2. Note, the WwNP mapping is broadscale and indicative, therefore further investigation will be required for any land shown to have potential for WwNP.

There may be potential flood risk alleviation through tree planting on the site and on the rural land to the north, west and south.

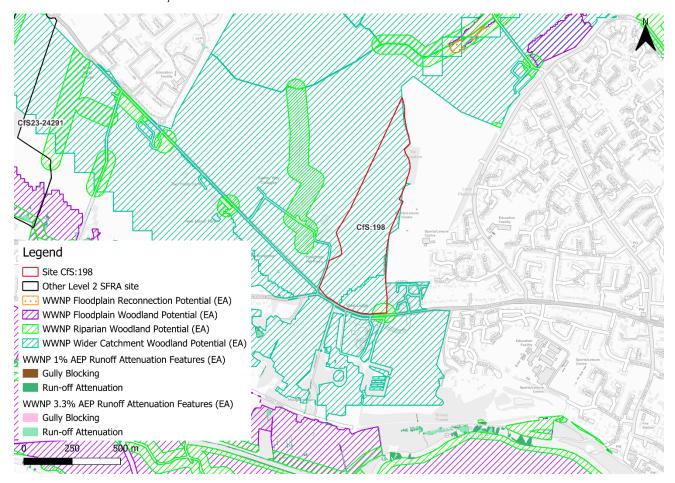


Figure 2-2: Natural Flood Management (NFM) potential mapping



#### 2.3 Impacts from climate change

#### 2.3.1 Fluvial

The EA's Flood Map for Planning shows the site is not at risk from fluvial climate change.

#### 2.3.2 Tidal

The EA's Flood Map for Planning shows the site is not at risk from tidal climate change.

#### 2.4 Historic flood incidents

The EA's Historic Flood Map (HFM) and Recorded Flood Outlines (RFO) datasets have been considered. No historic events have been recorded on or near the site.

#### 2.5 Emergency planning

#### 2.5.1 Flood warning

The EA operates a Flood Warning Service for properties located within a Flood Warning Area (FWA) for when a flood event is expected to occur. This site is not located within a FWA.

Flood alerts may be issued before a flood warning for properties located within a Flood Alert Area (FAA) to provide advance notice of the possibility of flooding. A flood alert may be issued when there is less confidence that flooding will occur in a FWA. This site is not located in a FAA.

#### 2.5.2 Access and escape routes

Based on available information, safe access and escape routes will be from Houghton Road on the southern site boundary, as shown in Figure 2-3.





Figure 2-3: Potential access and escape route



# 2.6 Observations, mitigation options, site suitability, sequential approach to development management - fluvial and tidal

- Observations:
  - The proposed development of the site would see a change in the risk classification from less vulnerable to more vulnerable, according to the NPPF.
  - The site is wholly within Flood Zone 1 and not shown to be at risk from climate change.
- Mitigation:
  - A site-specific FRA will be required as the site area is greater than 1 hectare in size.
- Access and escape:
  - Safe access and escape routes will likely be from Houghton Road.



# 3 Flood risk from surface water

#### 3.1 Existing risk

The NaFRA2 Risk of Flooding from Surface Water (RoFSW) mapping received a significant update and was published January 2025, including for surface water flood extents and depths. However, at the time of writing, the EA has confirmed that the depth information available is not structured in a way that is suitable for planning purposes. Therefore, this Level 2 SFRA considers the third generation RoFSW depth and hazard mapping in addition to the NaFRA2 extents, as agreed with the EA. Surface water depth and hazard should be modelled at the site-specific FRA stage.

#### 3.1.1 Risk of Flooding from Surface Water - NaFRA2 extents

Based on the EA's national scale RoFSW map, as updated in January 2025, most of the site is at very low risk. There is a field drain / ditch in the centre of the site which is represented in the RoFSW. Most other risk areas are due to topographic low spots where localised ponding has occured.

Table 3-1: Existing surface water flood risk based on percentage area at risk using the NaFRA2 RoFSW map

Very low risk (% area)	Low risk (% area)	Medium risk (% area)	High risk (% area)
92	4	2	2



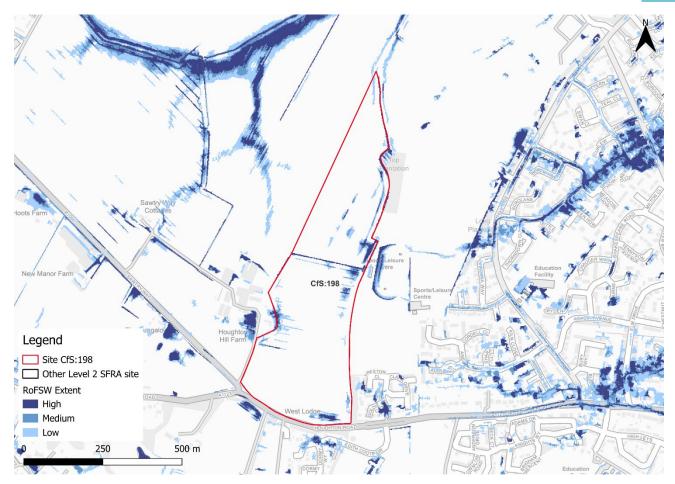


Figure 3-1: Surface water flood extents (NaFRA2 - Risk of Flooding from Surface Water map)

#### 3.1.2 Risk of Flooding from Surface Water - third generation depths and hazard

Based on the EA's national scale third generation RoFSW map, medium risk flood depths and hazards show significantly less risk than the NaFRA2 RoFSW. The central field drain is not included, and the majority of ponded areas are not present.

There are therefore clear differences between the NaFRA2 RoFSW map and the thirdgeneration depths and hazard mapping. This reinforces the requirement for detailed assessment of surface water at the FRA stage to establish surface water flood risk conditions.



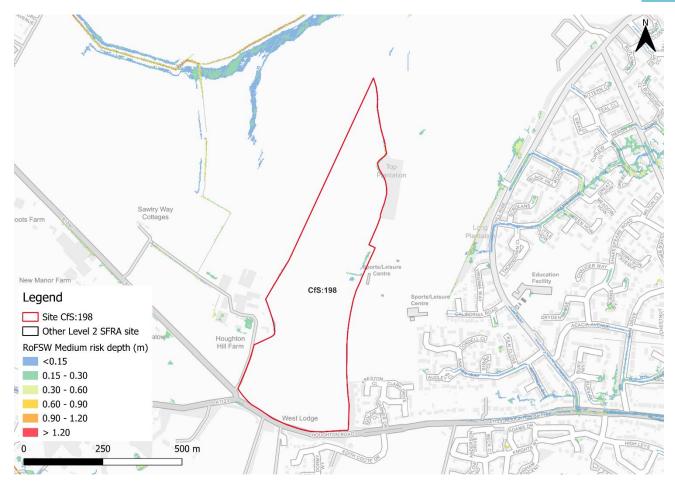


Figure 3-2: Medium risk event surface water flood depths (Third generation - Risk of Flooding from Surface Water map)



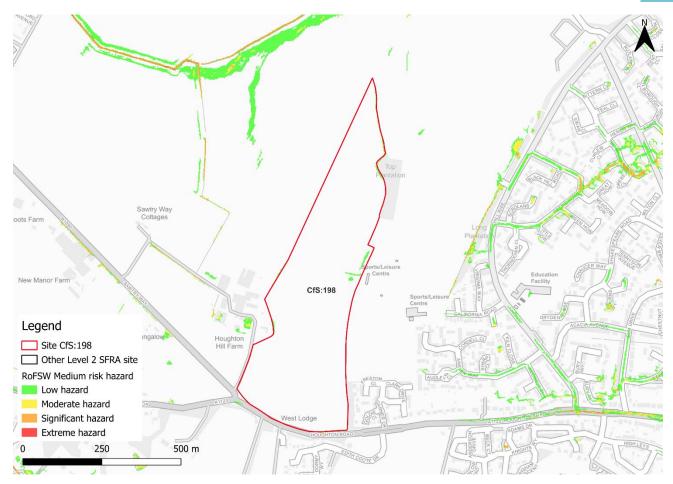


Figure 3-3: Medium risk event surface water flood hazard<sup>1</sup> (Third generation - Risk of Flooding from Surface Water map)

#### 3.2 Impacts from climate change

The NaFRA2 RoFSW mapping now includes one modelled climate change scenario, the 2050s central allowance for the high, medium and low risk events. However, the upper end allowance on peak rainfall for the 2070s should be assessed in SFRAs. Therefore, at the time of writing, the available national surface water climate change mapping is unsuitable for consideration in development planning. This Level 2 SFRA considers the low risk surface water event as a conservative proxy for the medium risk event plus climate change, as agreed with the EA. The impact of climate change on surface water flood risk should be fully accounted for at the site-specific FRA stage.

Based on the information available, surface water flood risk to the site may increase with climate change. The risk area is shown to expand in size though flood depths remain shallow and hazards low.

The potential access and escape routes remain at very low risk.

<sup>1</sup> Based on Section 7.5 Hazard rating. What is the Risk of Flooding from Surface Water map? Report version 2.0. April 2019. Environment Agency



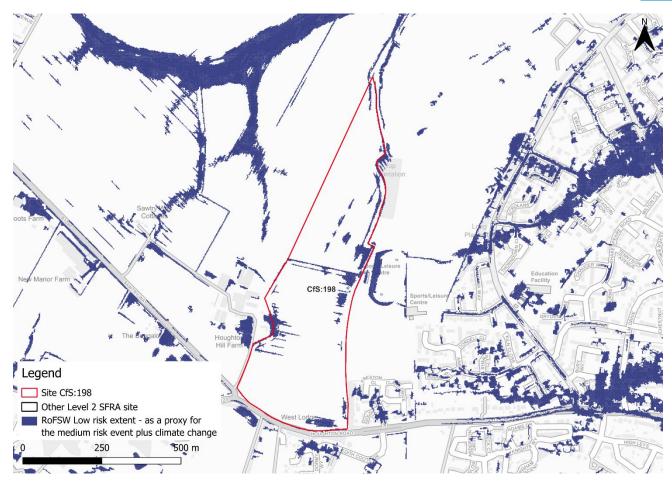


Figure 3-4: Low risk event surface water flood extent, as a proxy for the medium risk event plus climate change (NaFRA2 - Risk of Flooding from Surface Water map)



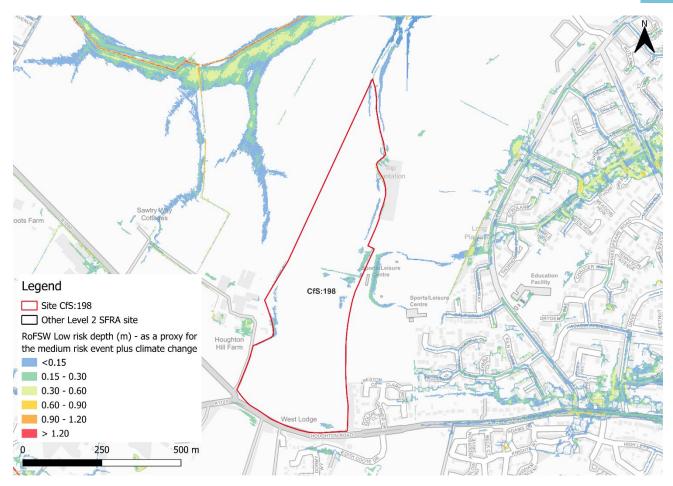


Figure 3-5: Low risk event surface water flood depths, as a proxy for the medium risk event plus climate change (Third generation - Risk of Flooding from Surface Water map)



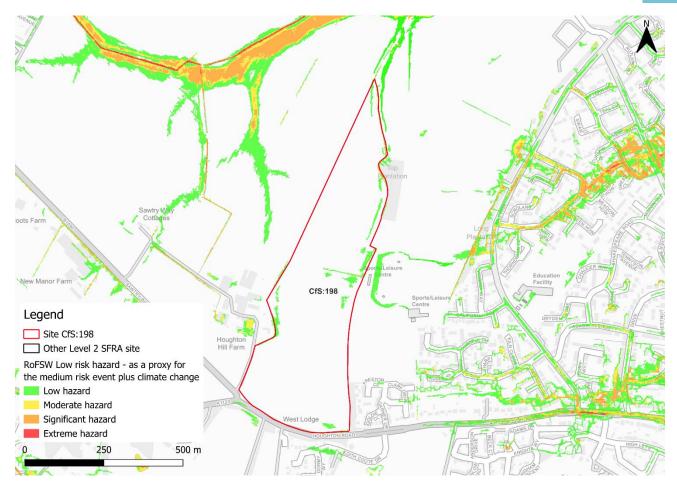


Figure 3-6: Low risk event surface water flood hazard, as a proxy for the medium risk event plus climate change (Third generation - Risk of Flooding from Surface Water map)

# 3.3 Observations, mitigation options, site suitability, sequential approach to development management - surface water

- Current risk to the site is nominal, with 92% of the site being at very low risk. Risk
  is confined to the ditch in the centre of the site and a few localised topographic
  depressions.
- The effects of climate change on surface water have not been modelled for this SFRA, however the low risk surface water event has been used as a proxy for the medium risk event plus climate change. Risk is shown to increase in extent though depths and hazards remain low.
- Surface water flood depths, hazards, including for the impact of climate change should be considered further through the site-specific FRA and drainage strategy. Any surface water modelling at the FRA stage should consider flood depths and hazards.
- Were development plans to proceed, a full detailed drainage strategy would be required to ensure there is no increase in surface water flood risk elsewhere as a result of new development.
- Greenfield runoff rates will apply for the site, and the developer should follow the National SuDS guidance and any local guidance available from the LLFA.



- Surface water modelling based on layout plans and detailed design may be required through consultation with the LLFA.
- Safe access and escape appear to be possible when accounting for climate change.
- The RoFSW map is not suitable for identifying whether an individual property will flood and is therefore indicative. The RoFSW map is not appropriate to act as the sole evidence for any specific planning or regulatory decision or assessment of risk in relation to flooding at any scale without further supporting studies, modelling, or evidence.



# 4 Cumulative impacts assessment and high risk catchments

#### 4.1 Level 1 cumulative impacts assessment

A cumulative impact assessment was completed through the Huntingdonshire Level 1 SFRA (2024), which aimed to identify catchments sensitive to the cumulative impact of new development. This site is located within two catchments, namely, the Marley Gap Brook catchment for the majority of the site, and the Ouse (Roxton to Earith) catchment for the southeastern corner of the site. Both catchments are ranked as high sensitivity catchments. Planning considerations for sites at high sensitivity to the cumulative impacts of development can be found in Appendix G of the Level 1 SFRA. Cumulative impacts of development should also be considered as part of a site-specific FRA.



# 5 Groundwater, geology, soils, SuDS suitability

Risk of groundwater emergence is assessed in this SFRA using JBA's 5m Groundwater Emergence Map. This dataset is recommended for use by the EA in the SFRA Good Practice Guide<sup>2</sup>. Figure 5-1 shows the map covering this site and the surrounding areas. Table 5-1 explains the risk classifications.



Figure 5-1: JBA 5m Groundwater Emergence Map

The whole site is shown to be at no risk. Infiltration SuDS are therefore likely to be appropriate.

<sup>2</sup> Strategic flood risk assessment good practice guide. ADEPT. December 2021.



Table 5-1: Groundwater Hazard Classification

Groundwater head difference (m)*	Class label		
0 to 0.025	Groundwater levels are either at very near (within 0.025m of) the		
	Within this zone there is a risk of groundwater flooding to both surface and subsurface assets. Groundwater may emerge at significant rates and has the capacity to flow overland and/or pond		
0.025 to 0.5	Groundwater levels are between 0.025m and 0.5m below the ground surface in the 100-year return period flood event.		
	Within this zone there is a risk of groundwater flooding to surface and subsurface assets. There is the possibility of groundwater emerging at the surface locally.		
0.5 to 5			
	There is a risk of flooding to subsurface assets, but surface		
>5	Groundwater levels are at least 5m below the ground surface in the 100-year return period flood event. Flooding from groundwater is not likely.		
N/A	r looding from groundwater to flot likely.		
	This zone is deemed as having a negligible risk from groundwater		
*Difference is defir mAOD.	*Difference is defined as ground surface in mAOD minus modelled groundwater table in mAOD.		





Figure 5-2: Soils and geology



# 6 Residual risk

Although a site may be afforded some protection from defences and / or drainage infrastructure, there is always a residual risk of flooding from asset failure i.e. breaching / overtopping of flood defences, blockages of culverts or drainage assets.

There does not appear to be any residual risk to the site.

#### 6.1 Flood risk from reservoirs

The EA's Reservoir Flood Maps (RFM) (2021) show where water may go in the unlikely event of a reservoir or dam failure. Figure 6-1 shows the RFM in a 'dry day' and 'wet day' scenario. A 'dry day' scenario assumes that the water level in the reservoir is the same as the spillway level or the underside of the roof for a service reservoir and the watercourses upstream and downstream of the reservoir are at a normal level. A 'wet day' scenario assumes a worst-case scenario where a reservoir releases water held on a 'wet day' when local rivers have already overflowed their banks.

The site is shown to not be at risk from reservoir failure.



## 7 Overall site assessment

#### 7.1 Can part b) of the exception test be passed?

This site is not required to pass part b) of the exception test as it is not located within Flood Zone 3a, however it must still be proven that the development can be safe for its lifetime, which is 100 years for residential development.

#### 7.2 Recommendations summary

Based on the evidence presented in the Level 1 SFRA (2024) and this Level 2 SFRA:

- It should be appropriate to develop this site for more vulnerable purposes given its location within Flood Zone 1.
- A detailed drainage strategy will be required for any new development, given the fact the land is currently open greenspace.
- Opportunities for NFM features to reduce flood risk to the site in the future through tree planting should be explored at the site-specific FRA stage.

#### 7.3 Site-specific FRA requirements and further work

At the planning application stage, the following should be considered:

- A drainage strategy will be required. Discharge rates should remain at greenfield rates at a minimum. The LLFA should be consulted.
- The FRA should be carried out in line with the latest versions of the NPPF; FRCC-PPG; EA online guidance; the HDC Local Plan, and national and local SuDS policy and guidelines.
- Throughout the FRA process, consultation should be carried out with, where applicable, the local planning authority; the lead local flood authority; emergency planning officers; the Environment Agency; Anglian Water; the highways authorities; and the emergency services.



# 8 Licencing

To cover all figures within this report:

- Contains Environment Agency information © Environment Agency and/or database right [2025]
- Contains public sector information licensed under the Open Government Licence v3.0. © Crown copyright and database rights [2025]
- HDC Ordnance Survey licence number: 100022322 [2025]
- © 2021 Esri, Maxar, Earthstar Geographics, USDA FSA, USGS, Aerogrid, IGN, IGP, and the GIS User Community

#### www.jbaconsulting.com





#### **Our Offices**

Bristol Newcastle Coleshill Newport Cork Peterborough Doncaster Portsmouth Dublin Saltaire Edinburgh Skipton Exeter Tadcaster Thirsk Glasgow Haywards Heath Wallingford Leeds Warrington

JBA Consulting
JBA Risk Management
JBA Global Resilience

JBA Risk Management Inc

JBA Consulting Ireland

JBA Consult Europe Romania

Ireland 🔏 UK

Limerick

Cambodia

Singapore

Mekong Modelling Associates

JBA Risk Management Pte Ltd

Australia

**JBPacific** 

#### **Registered Office**

1 Broughton Park Old Lane North Broughton SKIPTON North Yorkshire BD23 3FD United Kingdom +44(0) 1756 799919 info@jbaconsulting.com www.jbaconsulting.com

Follow us on X in

Jeremy Benn Associates Limited Registered in England 3246693 JBA Group Ltd is certified to ISO 9001:2015 ISO 14001:2015 ISO 27001:2022

ISO 45001:2018











